

ecom-UNO

The pocket-sized differential pressure gauge for accurate and fast pressure measurements on gas heaters and burners



MOBILE PRESSURE MEASUREMENT

Made in Germany



Flexible

Thanks to four switchable units and automatic range switching



Efficient

Thanks to measurement of 4 different pressures (flow, system, blower and static pressure)



Secure

Thanks to integrated holding magnets for freehand measurement



ecom GmbH
Am Großen Teich 2
58640 Iserlohn
info@ecom.de

ecom[®]
Measurement Technology

„Precise measurement of the system guarantees efficiency and, above all, safety.“

THE LITTLE PRESSURE GAUGE

For adjustment work on gas heatings and gas burners




- Units switchable (hPa, mmH₂O, PSI, mmHg)
- Automatic range switch
- Incl. 2 silicone hoses and reducing pieces
- Incl. tough protective bag

Technical data ✓ Standard

Application Purpose	
Gas burner adjustment	
Device connection pressure (flow pressure)	✓
Nozzle pressure (flow pressure)	✓
Gas operation pressure (plant pressure)	✓
Static pressure	✓
Blower pressure	✓

Measuring range	Resolution	Accuracy
0...200 hPa	0,1 hPa	1 % of reading

Unit	Range	Resolution	Overload
Air pressure (hPa)	± 200 hPa	0.01 hPa	300 hPa
Hydrostatic pressure (mmH ₂ O)	± 2.038 mm H ₂ O	0,1 mmH ₂ O	3.060 mmH ₂ O
Pressure per square inch(PSI)	± 2.9 PSI	0,01 PSI	4,35 PSI
Torr (mmHg)	± 150 mmHg	0.01 mmHg	225 mmHg

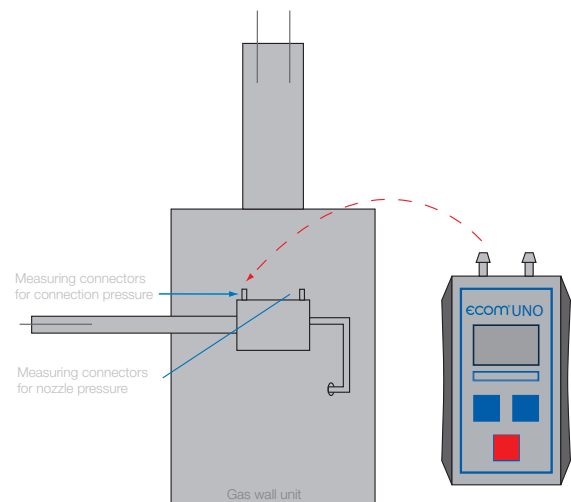

ecom-DP
for measuring different gas pressures



ecom-LSG
for leak detection of flammable gases



e.CLOUD by ecom
digital measurement and customer data management



As of 07/24, design and technical changes as well as possible printing errors are subject to change.